



STORM WATER TREATMENT CHAMBER



- Easy to install
- Easy to maintain
- Easy to pump out
- Competitive costs

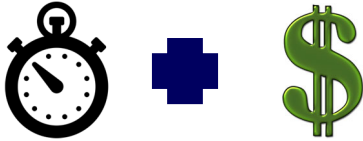

- Chemical Resistance
- pH range 1.5-14
- Virtually watertight-tank, pipe stub, access riser

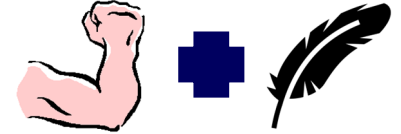

- Strong but lightweight
- Capable of being installed in a HS-25 loaded condition or in a greenbelt



Macomb & Wayne County APPROVED!!

KSI Storm Water Treatment Sizing Chart

KSI Model	Macomb & Wayne County 75 Micron	75 Micron	110 Micron
350	1.8 cfs	2.2 cfs	2.3 cfs
500	2.3 cfs	2.9 cfs	3.0 cfs
750	3.3 cfs	4.1 cfs	4.2 cfs
1000	4.1 cfs	5.1 cfs	5.3 cfs
1250	5.0 cfs	6.3 cfs	6.5 cfs
1500	6.2 cfs	7.8 cfs	8.1 cfs
1750	7.4 cfs	9.2 cfs	9.5 cfs
2000	8.3 cfs	10.4 cfs	10.7 cfs
2500	9.8 cfs	12.3 cfs	12.6 cfs
3000	11.3 cfs	14.1 cfs	14.5 cfs
3500	13.8 cfs	17.2 cfs	17.7 cfs
3750	16.3 cfs	20.4 cfs	21.0 cfs
4000	18.8 cfs	23.5 cfs	24.3 cfs
4500	20.0 cfs	25.2 cfs	25.8 cfs
5000	22.0 cfs	27.5 cfs	28.4 cfs
5500	24.0 cfs	30.0 cfs	31.0 cfs
6000	30.5 cfs	38.1 cfs	39.3 cfs

Kennedy Solutions, Inc.
517-225-8338

Contact us at sales@kennedysolutionsinc.com

