



STORM WATER TREATMENT CHAMBER



- Easy to install
- Easy to maintain
- Easy to pump out
- Competitive costs

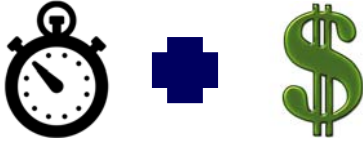

- Chemical Resistance
- pH range 1.5-14
- Virtually watertight-tank, pipe stub, access riser

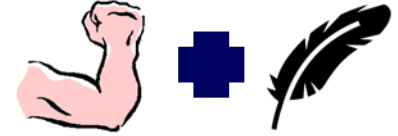

- Strong but lightweight
- Capable of being installed in a HS-25 loaded condition or in a greenbelt



Wayne County APPROVED!!
New larger sizes & higher flow rates

KSI Storm Water Treatment Sizing Chart

| KSI Model | Wayne County 75 Micron | 75 Micron | 110 Micron |
|-----------|------------------------|-----------|------------|
| 350 | 1.8 cfs | 2.2 cfs | 2.3 cfs |
| 500 | 2.3 cfs | 2.9 cfs | 3.0 cfs |
| 750 | 3.3 cfs | 4.1 cfs | 4.2 cfs |
| 1000 | 4.1 cfs | 5.1 cfs | 5.3 cfs |
| 1250 | 5.0 cfs | 6.3 cfs | 6.5 cfs |
| 1500 | 6.2 cfs | 7.8 cfs | 8.1 cfs |
| 1750 | 7.4 cfs | 9.2 cfs | 9.5 cfs |
| 2000 | 8.3 cfs | 10.4 cfs | 10.7 cfs |
| 2500 | 9.8 cfs | 12.3 cfs | 12.6 cfs |
| 3000 | 11.3 cfs | 14.1 cfs | 14.5 cfs |
| 3500 | 13.8 cfs | 17.2 cfs | 17.7 cfs |
| 3750 | 16.3 cfs | 20.4 cfs | 21.0 cfs |
| 4000 | 18.8 cfs | 23.5 cfs | 24.3 cfs |
| 4500 | 20.0 cfs | 25.2 cfs | 25.8 cfs |
| 5000 | 22.0 cfs | 27.5 cfs | 28.4 cfs |
| 5500 | 24.0 cfs | 30.0 cfs | 31.0 cfs |
| 6000 | 30.5 cfs | 38.1 cfs | 39.3 cfs |

Kennedy Solutions, Inc.
800-699-4046

Contact us at sales@kennedysolutionsinc.com