

HDPE OIL SEPARATORS

FOR
REPAIR/MAINTENANCE GARAGES
VEHICLE WASH DOWN BAYS



**KSI OGS UNITS COMPLY WITH 2018 MICHIGAN PLUMBING CODE
CHAPTER 10, SECTION 1003.4**



HDPE is resistant to corrosion.

KSI MODEL #	DIAMETER	LENGTH
300 GALLON	3 FT	7'-1"
500 GALLON	4 FT	6'-2"
750 GALLON	4 FT	9'-2"
1000 GALLON	4 FT	12'-3"
1250 GALLON	5 FT	9'-5"
1500 GALLON	5 FT	11'-4"
1750 GALLON	5 FT	13'-2"
2000 GALLON	5 FT	15'-1"

**CONTACT KSI FOR
HELP SIZING YOUR
NEXT OIL SEPARA-
TOR BASED ON YOUR
SPECIFIC SITE NEEDS**


**LARGER SIZES AND
CUSTOM SIZING &
CONFIGURATIONS
AVAILABLE**



- *Easy to install*
- *Easy to maintain*
- *Easy to pump out*
- *Competitive costs*



- *Chemical Resistance*
- *pH range 1.5-14*
- *Virtually watertight-tank, pipe stub, access riser*

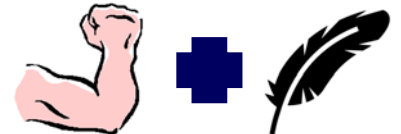

- *Strong but lightweight*
- *Capable of being installed in a HS-25 loaded condition or in a greenbelt*

Kennedy Solutions, Inc.
800-699-4046
Contact us at sales@kennedysolutionsinc.com