

HDPE OIL/GRIT SEPARATORS

FOR
REPAIR/MAINTENANCE GARAGES
VEHICLE WASH DOWN BAYS



State of Michigan APPROVED!!

KSI OGS UNITS ARE DESIGNED AND TESTED IN ACCORDANCE WITH MICHIGAN PLUMBING CODE, CHAPTER 10, SECTION 1003.4



HDPE is resistant to corrosion.


KSI MODEL #	DIAMETER	LENGTH
300 GALLON	3 FT	7'-1"
500 GALLON	4 FT	6'-11"
750 GALLON	4 FT	9'-2"
1000 GALLON	4 FT	12'-3"
1250 GALLON	5 FT	9'-5"
1500 GALLON	5 FT	11'-4"
1750 GALLON	5 FT	13'-2"
2000 GALLON	5 FT	15'-1"

CONTACT KSI FOR HELP SIZING YOUR NEXT OIL SEPARATOR BASED ON YOUR SPECIFIC SITE NEEDS

LARGER SIZES AND CUSTOM SIZING & CONFIGURATIONS AVAILABLE




- Easy to install
- Easy to maintain
- Easy to pump out
- Competitive costs

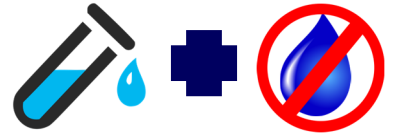

- Chemical Resistance
- pH range 1.5-14
- Virtually watertight-tank, pipe stub, access riser



- Strong but lightweight
- Capable of being installed in a HS-25 loaded condition or in a greenbelt

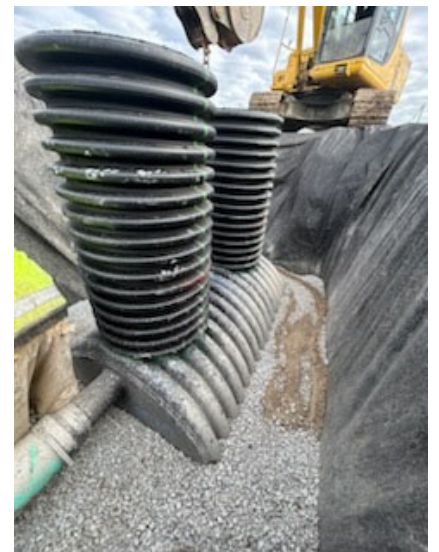

Kennedy Solutions, Inc.
517-225-8338
Contact us at sales@kennedysolutionsinc.com